

Maximize productivity with Compact and Sleek design



3-Inch Direct Thermal POS Printer


SLK-TE25

KEY FEATURES




Printing speed and Compatibility

- High speed printing at Max. 7.9ips (200mm/sec.)
- Versatile connectivity including USB, Serial(RS-232C), Parallel(IEEE1284), Ethernet, Bluetooth, Wi-Fi.
- Compatible with ESC/POS.

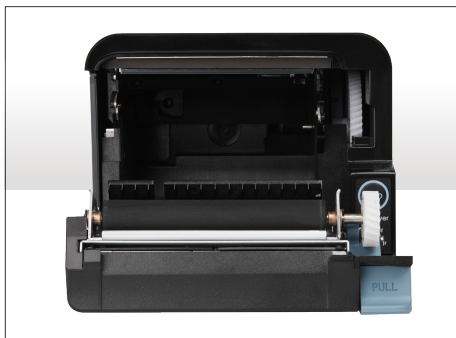

Efficient design for environments with limited space

- Front paper loading & exit design.
- Superior spill-proof with a sealed top.
- Small footprint and height of 4.9"(125mm) to help easily fit on the counter.

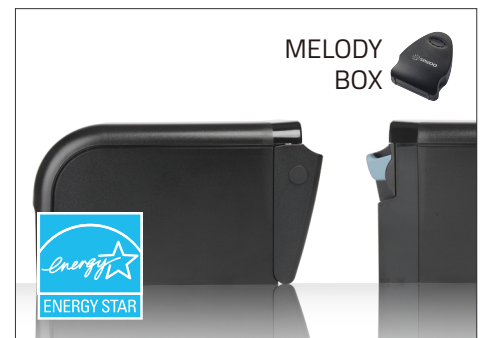

High reliability and Low Maintenance

- High reliability mechanism: 1.5 Million of Cutter life and 160km of TPH Life.
- Ideal for kitchen/bar printer with melody box.(Kitchen buzzer)
- Reduce power consumption and cost through energy star certification.

SLK-TE25 3-Inch POS Printer

SPECIFICATIONS

PRINTER CHARACTERISTICS

Print Method

Direct thermal

Print Speed

Up to 7.9ips(200mm/sec)

Print Width

Up to 2.8" (72mm)

Resolution

Standard: 180 dpi

Power

Power type : External SMPS
AC : 100~240Vac 50/60Hz
DC : 24Vdc / 1.75A

Sensor

Standard: Paper end, Paper low, Cover open
Optional: Black mark

Reliability

TPH life : 160km
MCBF : 60 Million lines
Cutter life : 1.5 Million cuts

Drawer port

2 Circuit(24V, 1A Max.)

OPERATING CHARACTERISTICS

Operating Temperature

32 ~ 113°F(0 ~ 45°C)

Operating Humidity

35 ~ 80%

Storage Temperature

-4 ~ 140°F(-20 ~ 60°C)

Storage Humidity

10 ~ 90%

PHISICAL CHARACTERISTICS

Dimension (W x D x H)

4.42" x 7.87" x 4.92"(112.5 x 200 x 125mm)

Weight (Kg)

3.0lb(1.4Kg)

MEDIA CHARACTERISTICS

Media Type

Thermal paper

Media Width

2.32", 3.14"(59, 80mm)

Media Core Diameter

0.4"(12.5mm)

Media Roll Diameter

3.2"(ø 83mm)

Thickness

0.06~0.09mm

INTERFACE

Standard

USB(B type)

Option

Serial(RS-232C), Parallel(IEEE1284), Ethernet,
Bluetooth 2.1+EDR(Enhanced data rate),
Wi-Fi(802.11 a/b/g/n)

- Wi-Fi

- WEP, TKIP and AES encryption
- WPA and WPA2
- 802.1x (with WEP, WPA or WPA2)
- EAP-TTLS, EAP-TLS, PEAP(MSCHAPv2)
- 802.11a/b/g/n
- Supports Certificates and Private Key Upload (PEM)
- Support for Ad Hoc / Soft AP Mode

AGENCY APPROVALS

CE, FCC, KC, UL/cUL, ENERGY STAR, Mfi

ACCESSORIES

Standard

Power Adaptor 24Vdc / 1.75A

Option

Melody Box

SOFTWARE

Emulation

ESC/POS Command compatible

Driver

Windows Driver(10, 2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Window CE & Mobile Driver & SDK (CE 4.2~, Mobile 5.0~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver

SDK

iOS, Android(2.1~), Windows, Linux, Blackberry, Symbian

BARCODE

1D

EAN-8, EAN-13, Code 39, Code 93, Code 128, ITF, UPC-A, UPC-E, Codabar

2D

QR, PDF417, Datamatrix

FONT / GRAPHICS

Character Size

Font A(12x24), Font B(9x17),
Chinese(Traditional/Simplified, 24x24),
Korean(24x24), Japanese(24x24)

Characters per Line (CPL)

Font A(12x24) : 42cpl,
Font B(9x17) : 56cpl,
Chinese/Korean/Japanese: 21cpl

Character Set

Alpha numeric character : 95
Extended graphic : 128 x 18(1 Space page)
International character : 14

COLOR

● ○
Black Ivory

**Republic of Korea [Head Office]**

28-6, Gajangsaneopdong-ro,
Osan-si, Gyeonggi-do, 18103,
Republic of Korea

T. +82-31-8077-5000
F. +82-31-624-5310
E. sales@miniprnter.com

México

Paseo de la Reforma No. 265 Piso 2.
Oficina SBC. Col. Cuauhtémoc,
C.P. 06500 Ciudad de Mexico

T. +52-1-55-3232-9543
E. sales@miniprnter.com

North America

20280 S. Vermont Ave. STE 200,
Torrance, CA 90502, USA

T. +1-310-561-8030
E. sales@miniprnter.com