

P2C 200 Series

P2C enhances the brand
value of customers

All-in-One
POS Terminal



P2C 200 Series

Designed as considering user's convenience

#DURABILITY
#SAFETY
#MAINTENANCE
#CONVENIENCE



Full Aluminum frame structure to optimize CPU heat dissipation

- Fanless application even for high-end CPUs (i3/i5/i7)
- Excellent anti-static effect and longevity of internal components



One-touch installation of 2nd display

- Easy and quick installation with automatic coupling structure (Takes 2 minutes)
- One integrated Cable Structure (One Cable - Power/Touch/DATA)
- Adjust the monitor angle by rotating up, down, left and right



Glass touch panel

- High screen clarity and low fatigue even when used for a long time
- Safe from scratches and can keep a clean screen for a long time



Secure Safety through tightening connection

- Prevent reverse current-protect main PCB
- Tighten connection for power
- Application of the plug type regardless of the direction of the power cable (Connection protection)



SSD Sliding structure design

- Easy switch SSD – Takes only 5 second
- Prevention of damage due to reverse insertion
- Rail structure to absorb vibration (SSD protection even in micro vibrations)



CPU
Intel-J4125,
J6412, i3/i5/i7




MEMORY
32GB (Max)




SSD
512GB (Max)

VARIOUS I/O INTERFACE PROVIDED

6 SERIAL, 6 USB

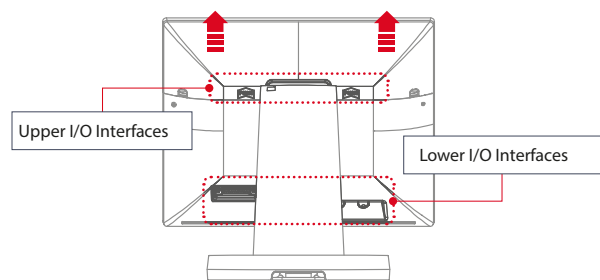

- ✓ Various serial port
- ✓ Wide rooms between I/O ports
- ✓ Multi display available (3 Products)

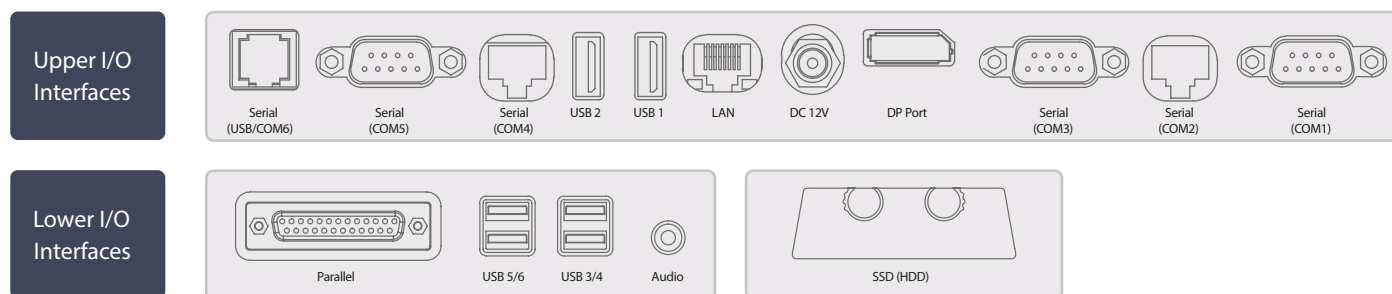

YOU CAN SELECT AND USE VARIOUS COMBINATIONS



Specifications

S-200		G-200		E-200	
System					
Processor	7th or 8th Generation Intel Core™ i3, i5, i7 Processors		Intel® Celeron® Quad-core Processor J4125 2.0GHz/2.7GHz		Intel® Celeron® Quad-core Processor J6412 2.0GHz/2.6GHz
Chipset / BIOS	Intel® Kaby Lake SoC / AMI		Intel® Gemini Lake SoC / AMI		Intel® Elkhart Lake SoC / AMI
Storage	2.5" SATA III SSD 64GB (HDD 500GB & SSD 128GB, optional) I)				
Memory	4GB SO-DIMM				
	DDR4 2133MHz x 2 (Max 32GB, optional) I)		4GB, DDR4 2400MHz x 1 (Max 16GB, optional) I)		DDR4 2666MHz~3200MHz x 1 (Max 32GB, optional)
Graphics	Intel® HD Graphics 520 / Intel® HD Graphics 620		Intel® UHD Graphics 600		Intel® UHD Graphics for 10th Gen Intel® Processors
Multi Mointor	3 (# of Disp lays Supported) - up to 3 monitors (optional) I)				
Expansion Slot	1 x mini PCI-e		1 x m.2 NVMe, 1 x m.2 WiFi & Bluetooth (optional I)		
OS	Windows 10 IoT Enterprise Value/High-End, POSReady 7		Windows 10 IoT Entry		
Display					
Primary Display Type	15" WLED Backlight (Brightness: 350 cd/m ² , 1024 x 768 Resolution)) * E-Series is 15.6" FHD (16:9) Available				
Touch	True-Flat Capacitive 10 Point Multi-touch				
I/O Interfaces					
Rear Top & Bottom Ports					
USB	6 x USB 3.0 (Rear Top x 2, Rear Bottom x 4) 1 x USB 2.0 (inc luded RJ11 port)		2 x USB 2.0(Rear Top), 2 x USB 2.0(Rear Bottom), 2 x 3.0(Rear Bottom), 1 x USB 2.0 (RJ11)		2 x USB 2.0 (Rear Top x 2), 4 x USB 3.0(Rear Bottom x 4) 1 x USB 2.0 (RJ11)
Serial	6 (DB9 x 3, RJ50 x 2, RJ11 x 1) COM1, 3, 5: DB9(+5V on pin #9, selectable by BIOS) COM2, 4 (RJ50, RJ45): Support +5V and 12V(G200 only) for Special Devices and can be used for Kitchen Printer COM6(RJ11): USB 2.0 and RS232 with +5V/1A for Card Reader				
Parallel	1 x LPT/IEEE 1284(DB25 on Rear Bottom)				
Audio	1 x Audio-out / 3.5mm				
Secondary Display	1 x DisplayPort (included 1 x USB 2.0 / Power Delivery +12V) *Can be used for HDMI and Standard DVI, VGA monitor by passive cable.				
LAN	1 x RJ45 (Base-T 10/100/1000 Ethernet)				
Speaker	1W x 1		3W x 1		
Peripheral Options					
Secondary Display  DisplayPort	• LCD Type: 9.7" or 15" LCD (USB Port x 1) • Touch Monitor: 9.7" or 15" LCD with Capacitive Touch (USB Port x 1) - by single cable(no power & USB cable) • Standard Monitor: supported standard DP, HDMI, DVI, VGA monitor by change monitor cable) • Standard and Powered DP MST Hub: supported standard or powered(customized) DP MST Hub.				
Customer Display (CDP)	VFD Type (A lphabet & Numeric, 20 characters x 2 lines)				
Card Reader (MSR / SCR)	Smart Card Reader: ISO/IEC7816 EMV Level 1 / Magnetic Stripe Reader: ISO 7811 ID-1 All tracks				*Interface: USB(HID) and RS232C(COM6)
Dallas Reader	Dallas Reader(i-button): 6 characters / prefix and suffix				*Interface: USB(HID) and RS232C(COM6)
Physical Dimension					
Dimension (W x D x H)	362 x 237 x 352 (mm) / 14.2 x 9.3 x 13.8 (inch)				
Weight	5 (Kg) / 11 (lb)				
Environment					
Power Supply	DC 12V/5A (AC 100V~240V, 60W)				
Temperature	Operating: 0 ~ 50 at 10% to 90% humidity				
Certifications	CE, FCC, KC, CB				

*Specifications are subject to change without prior notice.



IT'S TIME TO DECIDE ON YOUR BUSINESS PARTNER



Monterrey | Chihuahua | Ciudad de México | Guadalajara | Mazatlán
Tel. +52 (81) 8881 1080 Ext 1004 Cel. +52 (81) 2747 6654 E-mail. lcardenas@bnext.mx